


AC/DC 350W Enclosed Switching Power Supply

LM350-10Bxx, LM350-10Bxx-C, LM350-10Bxx-Q Series

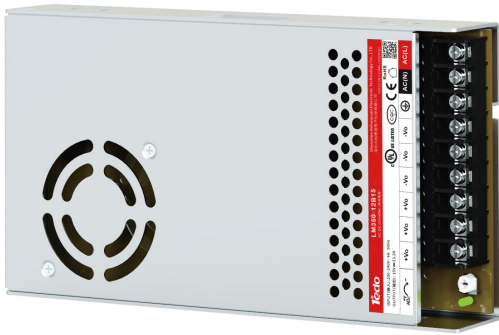

FEATURES

- Selectable AC input range: 90 - 132VAC/180 - 264VAC
- DC input range: 240 - 370VDC
- Ultra low standby power consumption < 0.75W @230VAC
- Operating ambient temperature range: - 30 °C to +70 °C
- LED indicator for power on
- Output short circuit, over-current, over-voltage, over-temperature protection
- Built-in DC fan
- Operating up to 5000m altitude



RoHS



LM350-10Bxx series is one of enclosed AC-DC switching power supply. It features selectable AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These power supply offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, EN60335, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
UL/EN/IEC CQC/BIS/UKCA	LM350-10B05	300	5V/60A	4.5-5.5	83.5	10000
	LM350-10B12	348	12V/29A	10.2-13.8	85	4000
	LM350-10B15	348	15V/23.2A	13.5-18	86	3300
	LM350-10B24	350.4	24V/14.6A	21.6-28.8	87	1500
	LM350-10B36	349.2	36V/9.7A	32.4-39.6	88	1500
	LM350-10B48	350.4	48V/7.3A	43.2-52.8	88.5	470

Note:1. *Use suffix "C" for terminal with protective cover, suffix "Q" for conformal coating.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	Low voltage (switch in position of 115)	90	--	132	VAC
		High voltage (switch in position of 230)	180	--	264	
	DC input	Switch in position of 230	240	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	6.8	8	A
	230VAC		--	3.4	4	
Inrush Current	Cold start	115VAC	--	60	--	
		230VAC	--	60	--	
Leakage Current	240VAC		--	--	0.75	mA
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±3	--	%
		12V	--	±1.5	--	
		15V/24V/36V/48V	--	±1	--	
Line Regulation	Rated load	--	±0.5	--		
Load Regulation	0% - 100% load	5V	--	±2	--	
		12V	--	±1	--	
		15V/24V/36V/48V	--	±0.5	--	



AC/DC 350W Enclosed Switching Power Supply

LM350-10Bxx, LM350-10Bxx-C, LM350-10Bxx-Q Series



Output Ripple & Noise*	20MHz bandwidth	5V/12V/15V/24V	--	150	--	mV
	(peak-to-peak value)	36V/48V	--	200	--	
Temperature Coefficient			--	±0.02	--	%/°C
Minimum Load			0	--	--	%
Stand-by Power Consumption	230VAC, 25°C		--	--	0.75	W
Hold-up Time	115VAC		--	12	--	ms
	230VAC		--	16	--	
Short Circuit Protection	Recovery time <8s after the short circuit disappear		Hiccup, continuous, self-recover			
Over-current Protection			110% - 180% Io, self-recover			
Over-voltage Protection	5V		5.75V-6.75V (Hiccup, self-recover)			
	12V		13.8V-16.2V (Hiccup, self-recover)			
	15V		18V-21V (Hiccup, self-recover)			
	24V		28.8V-33.6V (Hiccup, self-recover)			
	36V		41.4V-46.8V (Hiccup, self-recover)			
	48V		55.2V-59.5V (Hiccup, self-recover)			
Over-temperature Protection			Hiccup, self-recover			

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, details please refer to Enclosed Switching Power Supply Application Notes.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Test	Input - ⊕	Electric strength test for 1min., leakage current <10mA	2000	--	--	VAC
	Input - output		3000	--	--	
	Output - ⊕		500	--	--	
Insulation Resistance	Input - ⊕	At 500VDC	100	--	--	MΩ
	Input - output		100	--	--	
	Output - ⊕		100	--	--	
Operating Temperature			-30	--	+70	°C
Storage Temperature			-40	--	+85	
Fan On/Off Control	Fan On, temperature for Rth3		50	--	--	
	Fan Off, temperature for Rth3		--	--	40	
Operating Humidity	Non-condensing		20	--	90	%RH
Storage Humidity			10	--	95	
Switching Frequency			--	65	--	kHz
Power Derating	Operating temperature derating	+50°C to +70°C	2	--	--	%VAC
	Input voltage derating	90VAC - 100VAC	2	--	--	
		100VAC - 132VAC	0	--	--	
		180VAC - 264VAC	0	--	--	
		240VDC - 370VDC	0	--	--	
Safety Standard			IEC/EN/UL62368-1, GB4943.1, IS13252 (Part1) Safety Approval & BS EN 62368-1, EN62368-1 (Report) Design refer to EN60950-1, EN60335-1			
Safety Class			CLASS I			
MTBF	MIL-HDBK-217F@25°C		>300,000 h			

AC/DC 350W Enclosed Switching Power Supply

LM350-10Bxx, LM350-10Bxx-C, LM350-10Bxx-Q Series



Mechanical Specifications



Case Material	Metal (AL1100, SGCC)
Dimensions	215.00 x 115.00 x 30.00mm
Weight	700g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)





Emissions	CE	CISPR32/EN55032	CLASS A	
	RE	CISPR32/EN55032	CLASS A	
Immunity	ESD	IEC/EN 61000-4-2	Contact $\pm 6KV$ /Air $\pm 8KV$	perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	$\pm 2KV$	perf. Criteria A
	Surge	IEC/EN 61000-4-5	line to line $\pm 2KV$ /line to ground $\pm 4KV$	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	DIP	IEC/EN61000-4-11	0%,70%	perf. Criteria B

Remark: 1. One magnetic bead should be coupled with the output load line during CE/RE testing;
 2. When the power supply is used in the European Union or in applications that mandatory to meet the requirements of EN61000-3-2, users need to handle the harmonic current requirements, details please refer to Mornsun FAE. Applications like:
 (1) The terminal equipment is used in the European Union;
 (2) The terminal equipment is connected to public mains supply with 220VAC or greater rated nominal voltage that mandatory to meet the requirements of EN61000-3-2;
 (3) The power supply is installed in terminal equipment with average or continuous input power greater than 75W;
 (4) The power supply belongs to a part of lighting system.

Product Characteristic Curve

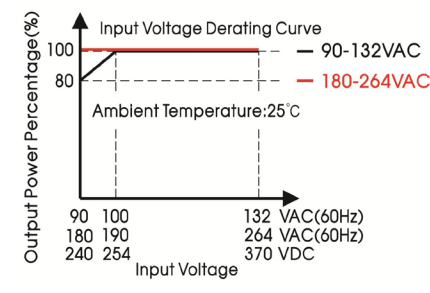

Note: This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

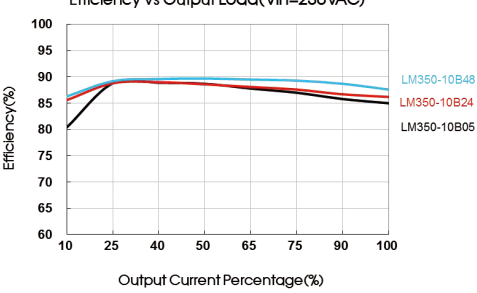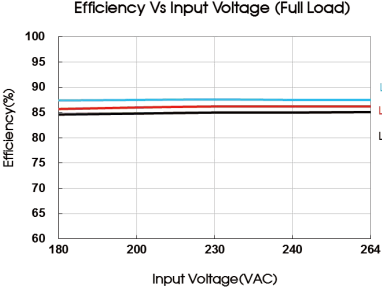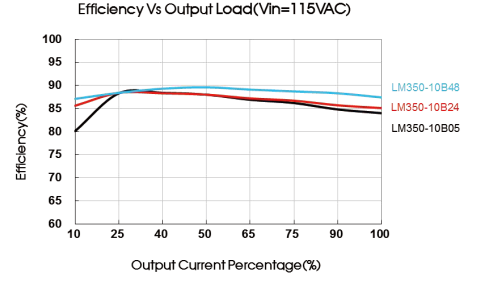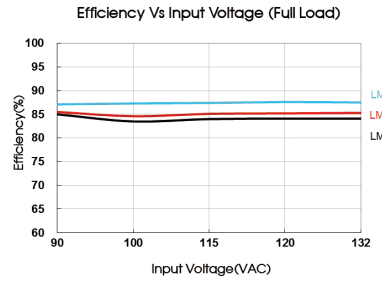


AC/DC 350W Enclosed Switching Power Supply

LM350-10Bxx, LM350-10Bxx-C, LM350-10Bxx-Q Series



Dimensions and Recommended Layout

LM350-10Bxx, LM350-10Bxx-Q Series

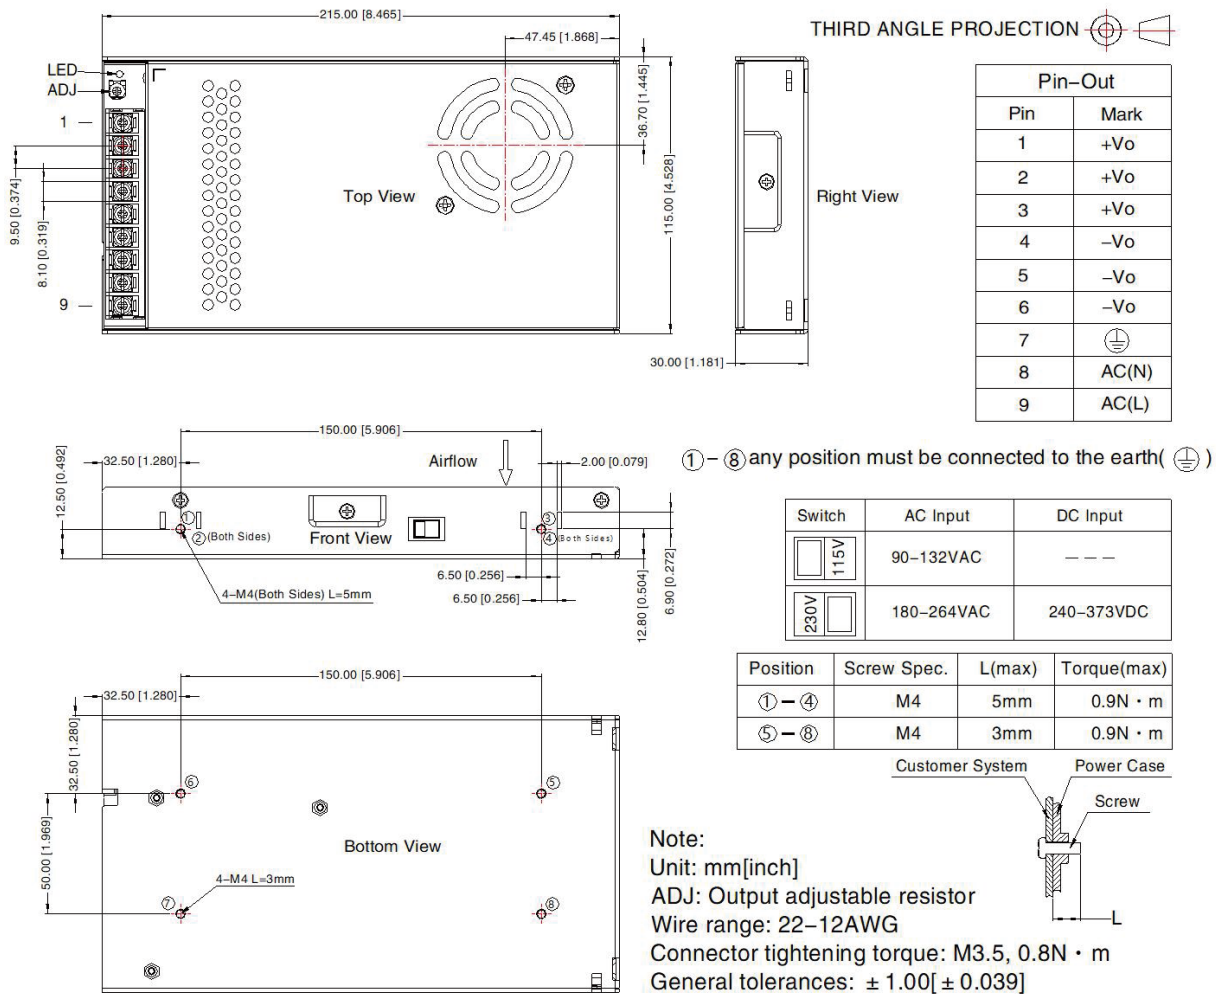


AC/DC 350W Enclosed Switching Power Supply

LM350-10Bxx, LM350-10Bxx-C, LM350-10Bxx-Q Series



LM350-10Bxx-C Series

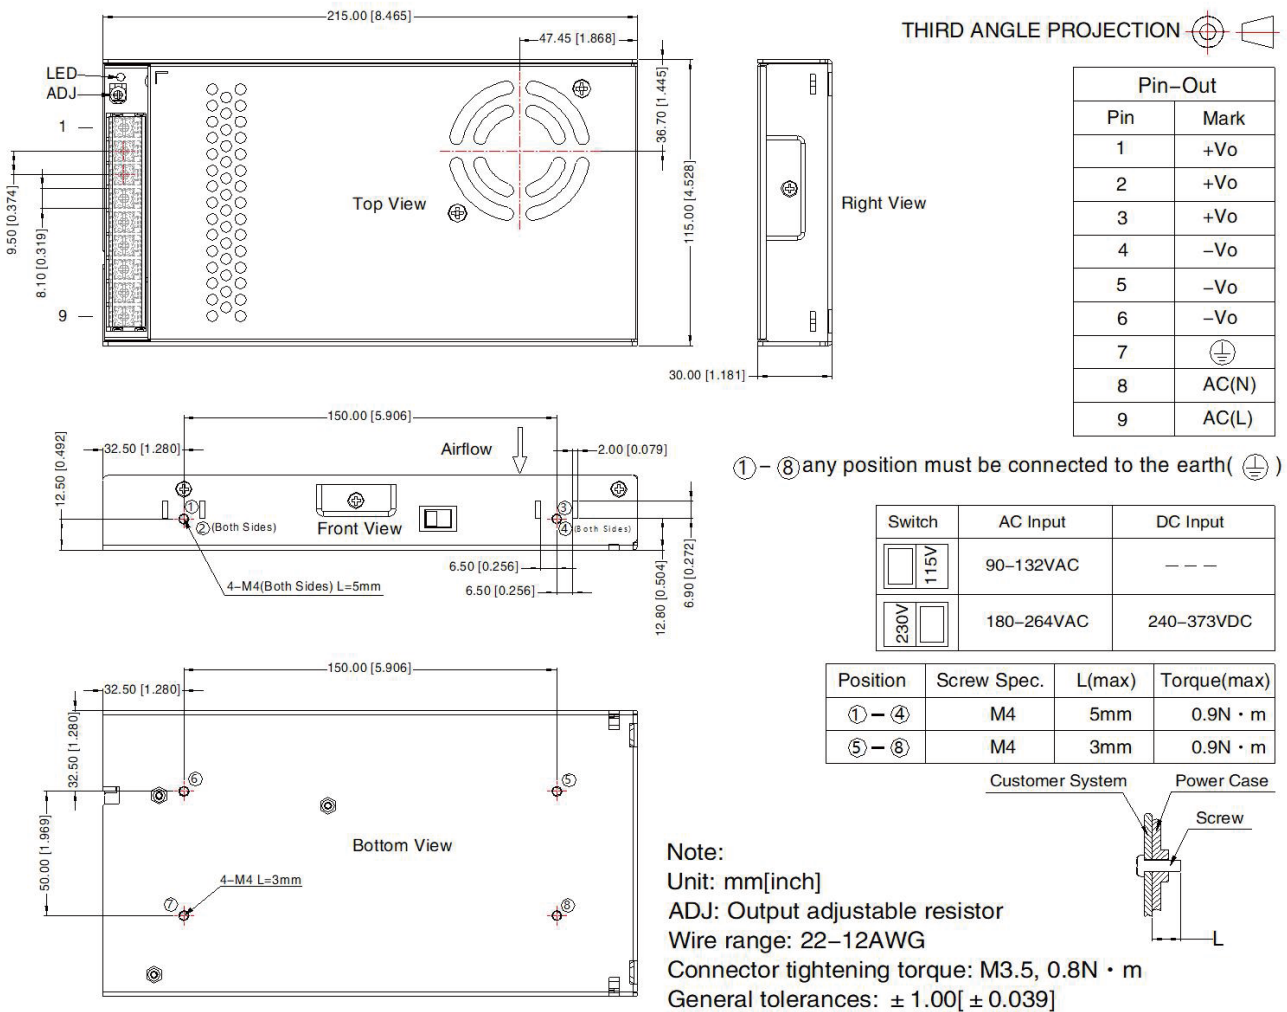

NOTE:

- For additional information on Product Packaging please refer to www.szhehuiyuan.com.
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to the earth of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.
- The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Shenzhen HHY Electronic Technology Co.,Ltd.

Address: 5F,Building B20,Hengfeng Industrial Park,xixiangtown,Bao'an district,Shenzhen,china

Tel: +86-755-61811368 Fax: +86-755-61809918 Web: www.szhehuiyuan.com Email: admin@szhehuiyuan.com

